


2.0

TECHNICAL SCHEME

PHY7 and CLACE = 105mm
PHY7 and CLALA/BKRTT = 155mm

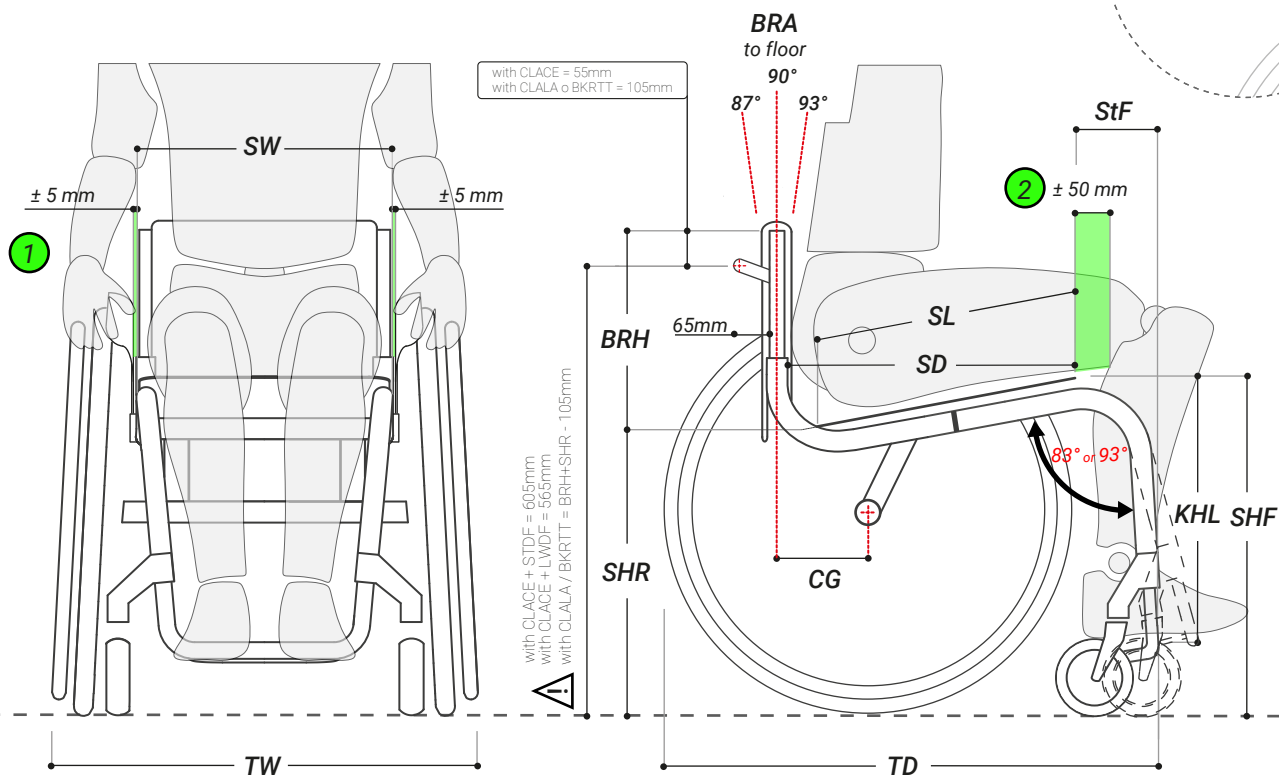

The technical scheme do not consider the dimensions of any postural and anti decubitus cushions.

SW: Considered external tube to external tube of the frame. The dimension between the internal faces of the side guards is +10 mm than the SW.

SD: Considered the depth of the seat. It considers the dimension from the end of the seat to the back tube.

SL: Considered the length of the seat pan. SL with CARBTS = SD - 20mm

CG: Considered from the backrest tube to the axle of the rear wheels.

SHF and SHR: Seat height front and rear can be adjusted only by tilting the seat. The frame tubes height to the floor is fixed.

BRH: Considered from the seat (upholstery or carbon) to the top of the backrest tube.

scan for measurements
tutorial



For a right sizing of the wheelchair is recommended:

① SW | Seat Width _ A space of ± 5 mm between the user basin and the side guards


② SD | Seat Depth _ A space of ± 50 mm between the user's popliteal fossa and the rigid carbon seat.



SW: 340 - 460 mm
in increments
of 20 mm



SD: 380 - 480 mm
in increments
of 20 mm



BRH: 270 - 420 mm
in increments
of 15 mm



SHR: 360 - 430 mm
in increments
of 10 mm



SHF: 450 - 520 mm
in increments
of 10 mm




KHL: 300 - 440 mm
in increments
of 10 mm



CG: 100 - 150 mm
in increments
of 10 mm



BRA: 87° - 93°
in increments
of 3°



CRW:
0° or 3°



StF: 120 - 160 mm
in increments
of 20 mm



TOTAL WIDTH (TW)
(Camber 0°) SW + 175 mm
(Camber 3°) SW + 220 mm



TOTAL DEPTH (TD)
StF + SD + 105 + 115
+ (100-CG) and
(+ 35mm if with FRM93) and
(- 20mm if with LWDF)



TRASPORT WEIGHT:
(Without rear wheels)
 ± 6.0 kg*



**MAXIMUM
USER WEIGHT:**
120 Kg



*** CONFIGURATION:**
SW340 / SD440 / STF120 /
LWDF / BRH255 / BKRTT /
BRH255 / AXLMG0CV / FOOTA2 /
BRKASL / FRKDS2 / FRWHP4 /
SDAL2 / BKRTT

ARIA WHEELS SRL

Registered Office_Via della Divisione Torino, 92 00143 Roma - Italy

Production Dept_Via A. Volta, 7/B 36030 Costabissara (VI) - Italy

VAT IT 12848301003 | tel. +39 0444701414

www.ariawheels.com | info@ariawheels.com



STANDARD CONFIGURATION

Frame angle:	Angle 83° - Closed frame (FRM83) Angle 93° - Open frame (FRM93)
Seat width (SW):	from 340 to 460 mm
Seat depth (SD):	from 380 to 480 mm
Seat to footrest (STF):	from 120 to 160 mm
Camber Rear Wheels (CRW):	0° or 3°
Center of Gravity (CG):	from 100 to 150 mm
Frame color:	Black (NR) Graphite Grey (GG) Light Green (VO) Yellow (GO)
Frame type:	Standard frame (STDF) Lowered frame (LWDF)
Rear wheels axle:	Black matte painted aluminium (AXAL20)
Seat type:	Carbon fibre seat pan with tilting system (CARBTS)
Seat height rear (SHR):	from 360 to 430 mm
Seat height front (SHF):	from 450 to 520 mm
Backrest system:	Fixed backrest (BKRUR)
Backrest type:	Aria adjustable Tension Backrest (BKRTT)
Backrest height (BRH):	from 270 to 420 mm
Backrest angle (BRA):	90° to floor (BRA90)
Footrest:	Adjustable with black painted aluminium cover (FOOTA2)
Knee to heel length (KHL):	from 300 to 440 mm
Brakes:	Aria scissor lock (BRKASL + BRKASR)
Rear wheels dimensions:	24 " 25 "
Rear wheels type:	Black Wheel with black hub and black spokes (RWHAG)
Handrim 24"/ 25":	Black anodized aluminium (HDRMB) Silver anodized aluminium (HDRMS)
Tyre 24x1.00 / 25x1.00:	Schwalbe Right Run - Black/Grey (WTSWR)
Forks:	Aria Double - Sided - black anodized aluminium (FRKDS2)
Front casters:	Black plastic 3" (FRWHP3), 4" (FRWHP4), 5" (FRWHP5)
Side guards / Armrests:	Black ABS Fendered SDAL (SDG20)
Calf band:	Calf band, height 8 cm - black textile (CLFB8)

Manufacturer's suggested retail price:

scan to configure



ARIA WHEELS SRL

Registered Office_Via della Divisione Torino, 92 00143 Roma - Italy
Production Dept._Via A.Volta, 7/B 36030 Costabissara (VI) - Italy
VAT IT 12848301003 | tel. +39 0444701414
www.ariawheels.com | info@ariawheels.com